

DISPLAY CHILLER / FREEZER

There are many advantages to purchasing a Display Fridge for your business, as they can really be a way of making your company excel.

- Easy to Clean
- Perfect Display
- Excellent Marketing Tool

(be sure to put your most valuable products at eye level for your customer to help drive more sales)

- Efficiency Boost

(easily see what stock you have on offer/ running low/ needs replacing)

Economy


- For general use which standard capacity but good enough
- Most affordable price
- Traditional design - vacuum glass / heater line glass door and silkscreen signboard design

Standard

- For general use but **more larger capacity** which can be stored more
- Affordable price and **most worth buying**
- Modern design - tempered glass (without heater line) and gorgeous sticker signboard design

Premium

- Large capacity
- **High-spec** accessories
- Most attractive price
- Grand design - tempered glass, signboard lamp design with aluminium frame and aluminium digital cover

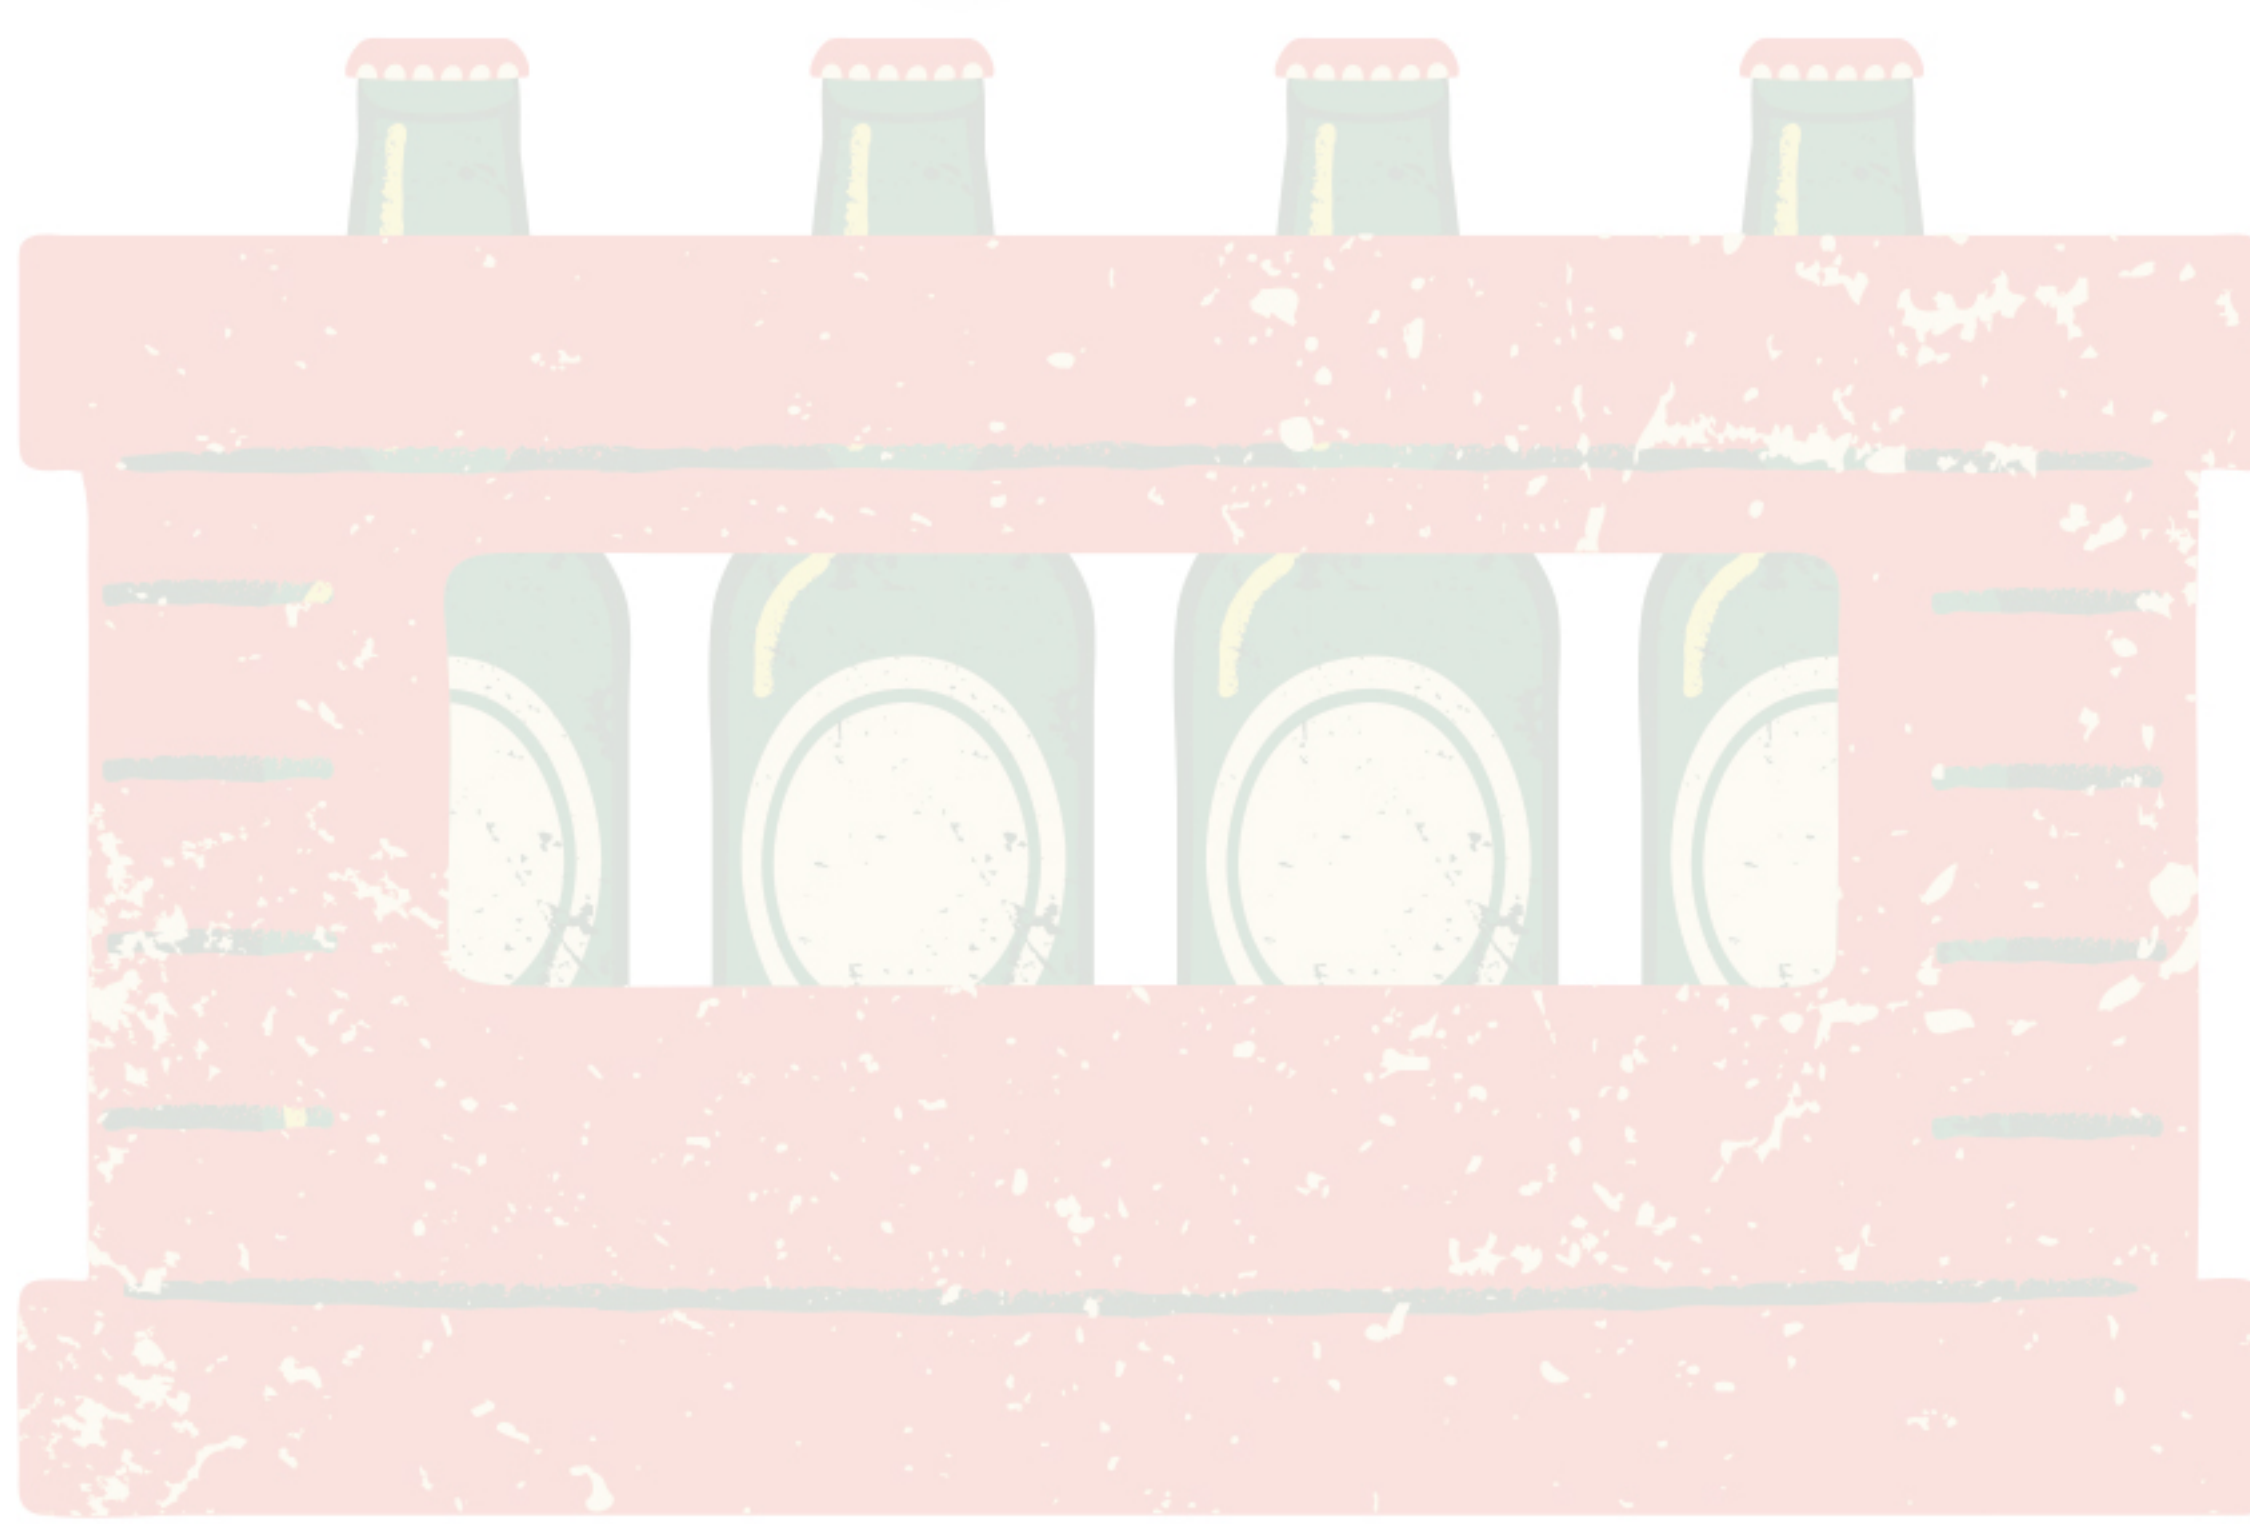

AWARDED ASIA PACIFIC
TOP EXCELLENCE BRAND




ALF FROST


COMMERCIAL REFRIGERATION



OPEN CHILLER

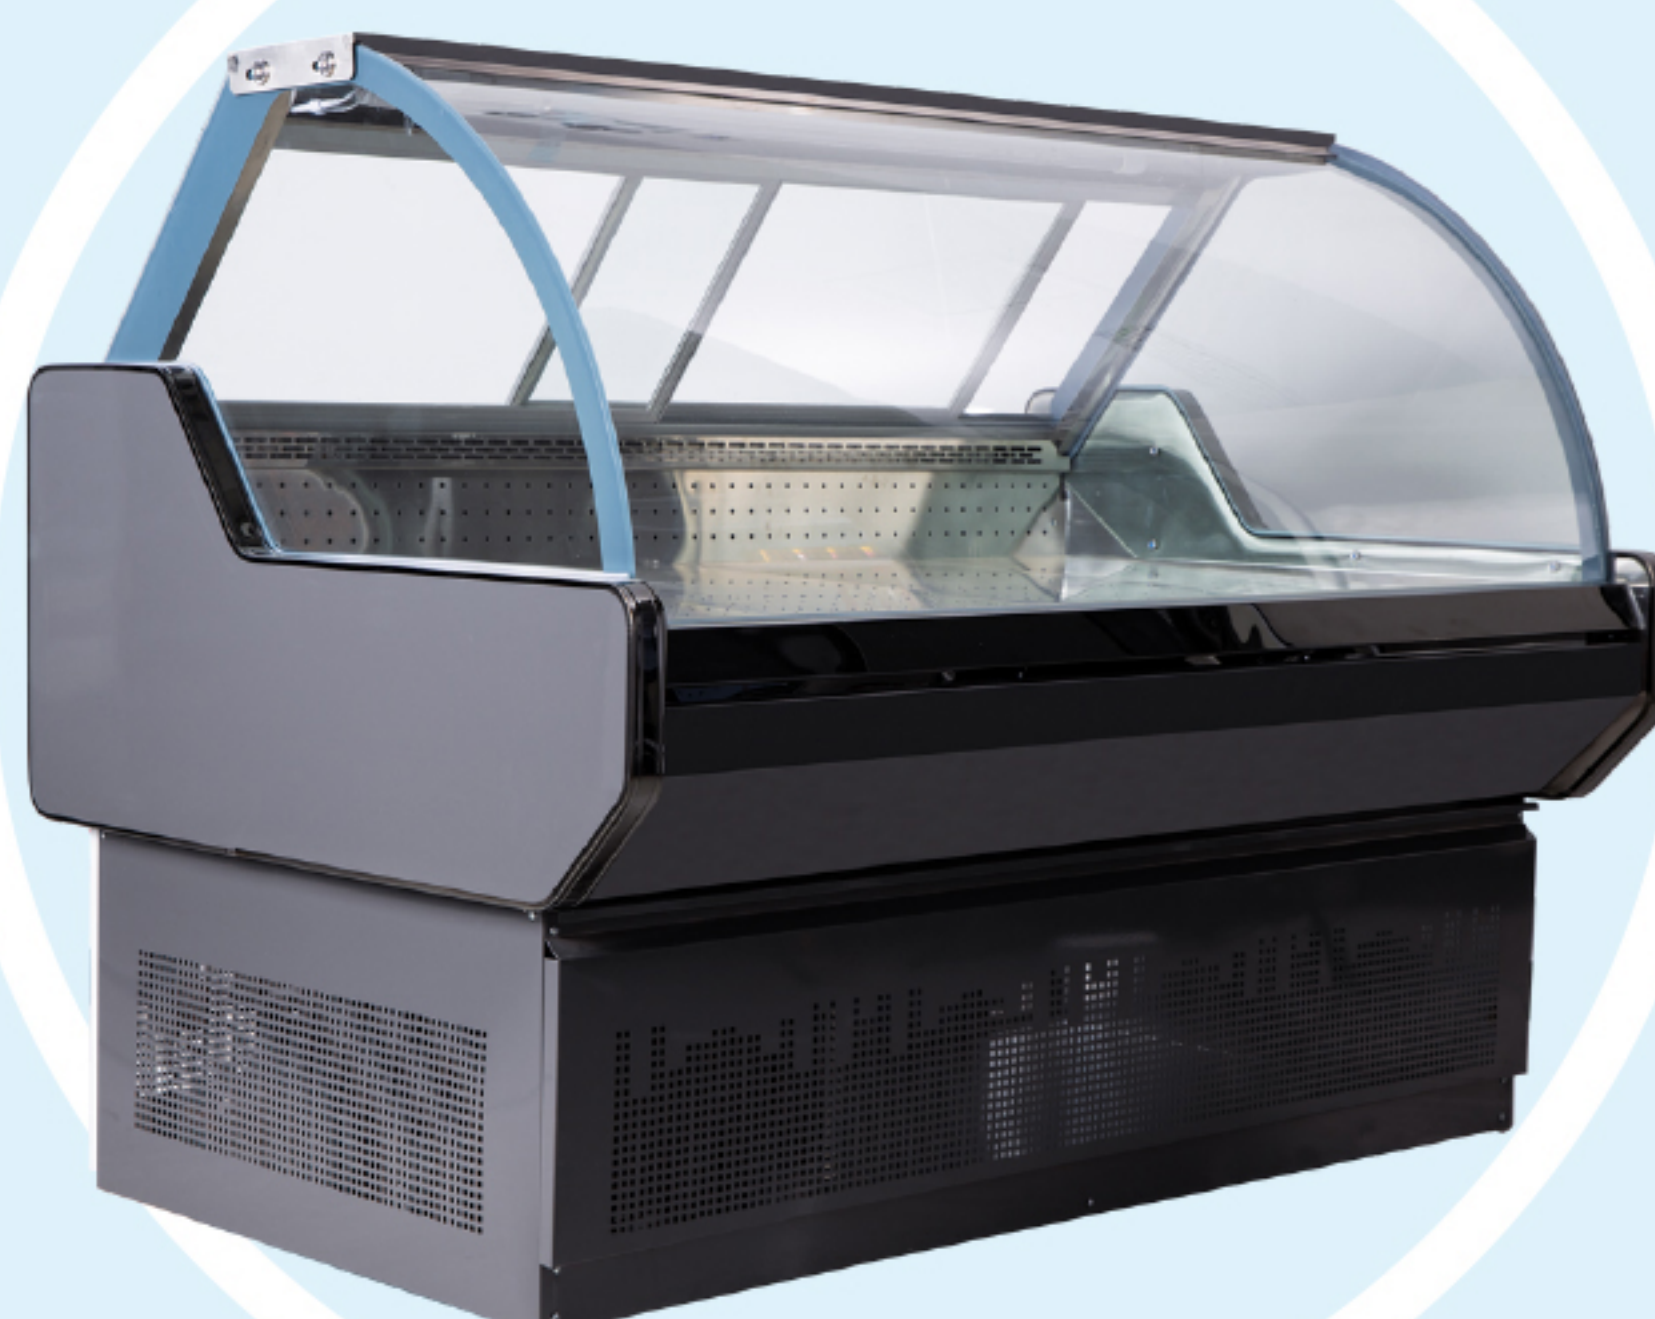

ARC MEAT FREEZER

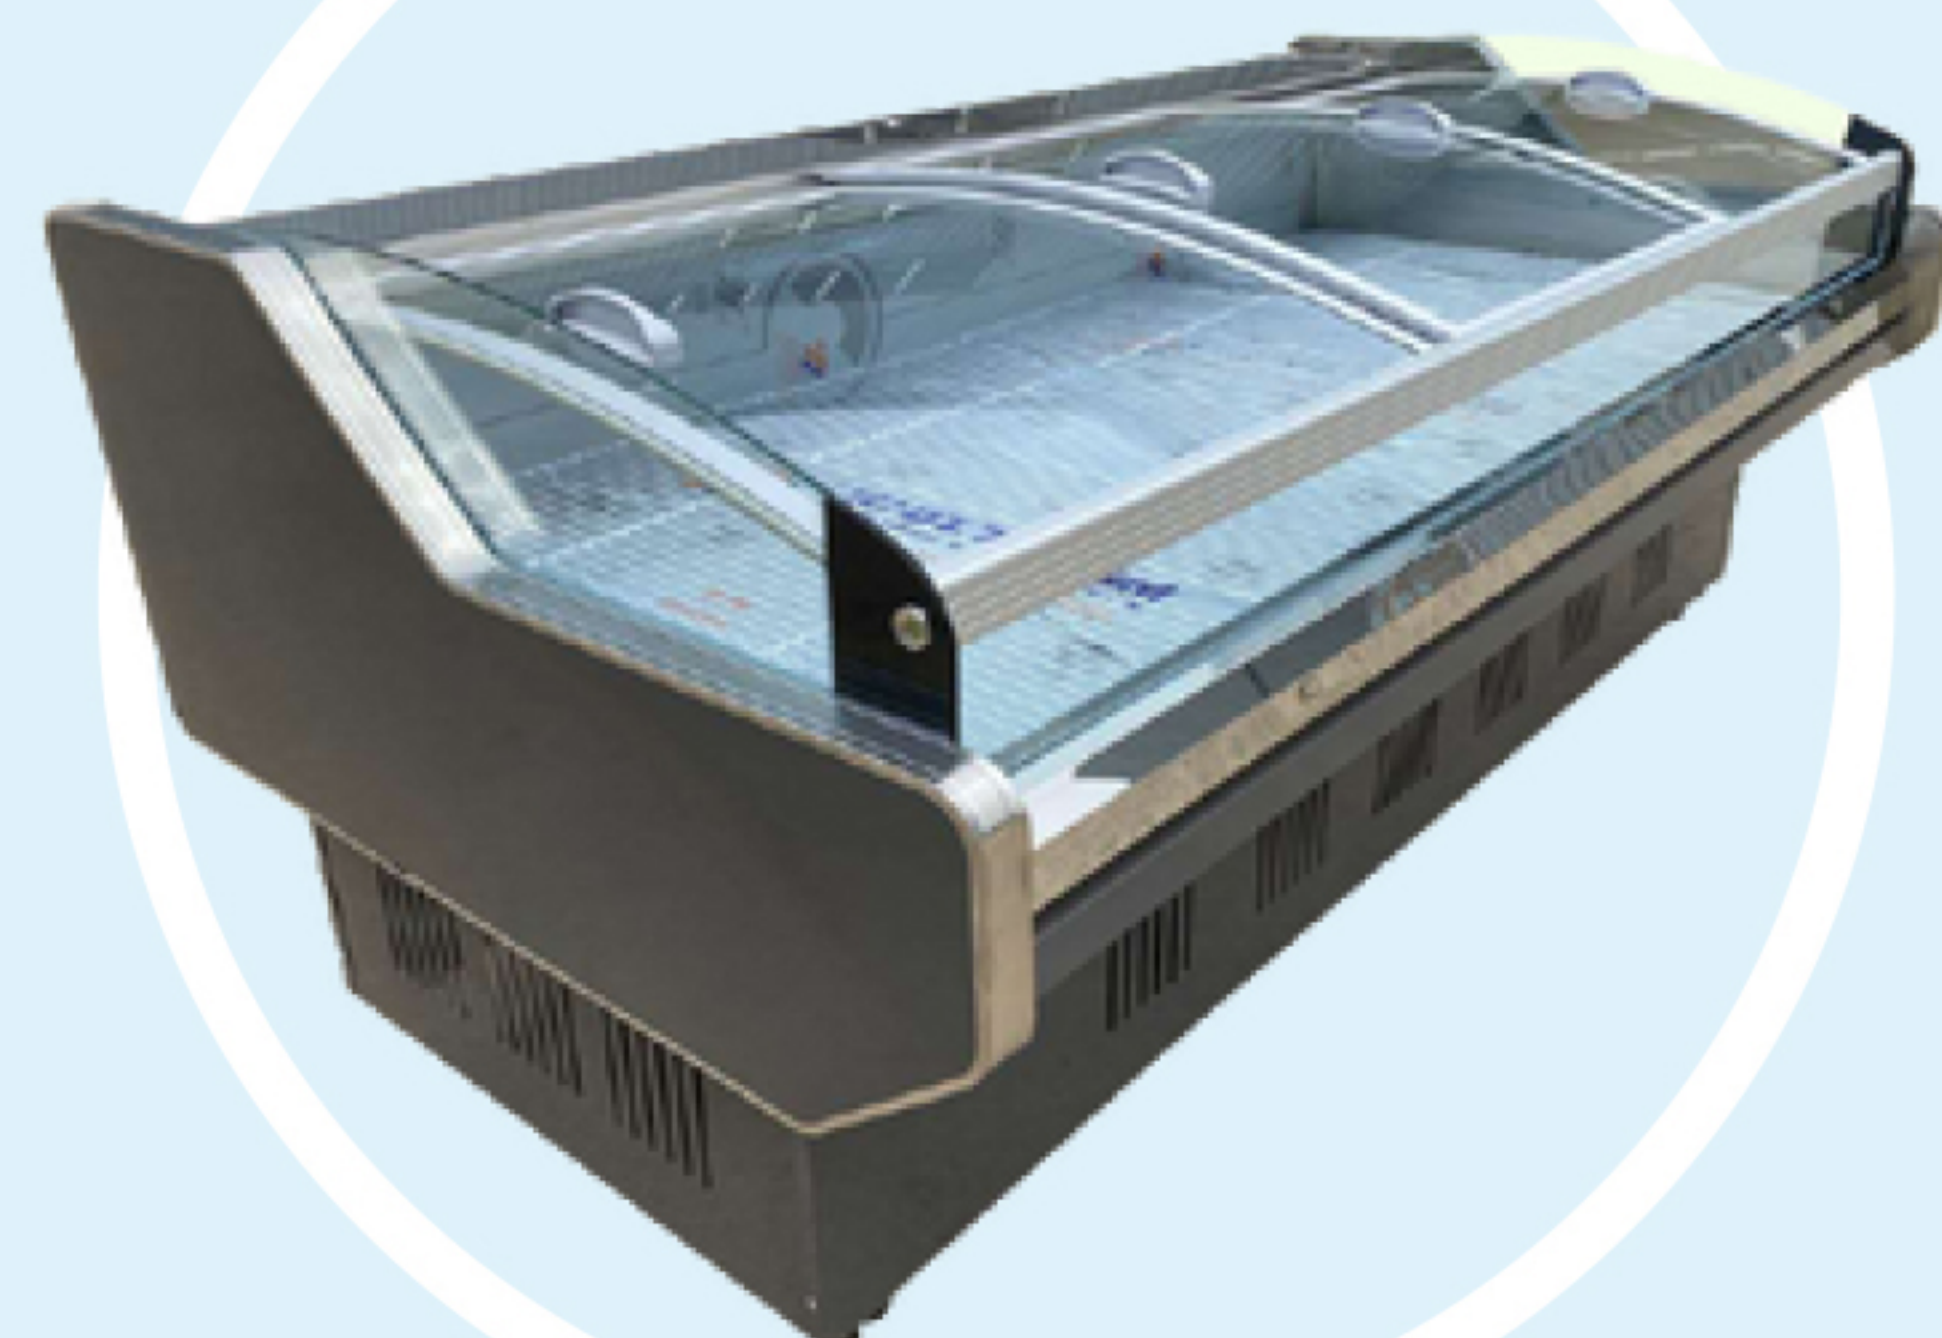

FLAT MEAT CHILLER



COMBINED ISLAND
FREEZER



(Back View)

4 DOOR UPRIGHT CHILLER
WITH BACK DOOR



CAKE SHOWCASE



CHILLER FREEZER WITH
CUSTOMIZED DRAWER



4 DOOR DISPLAY CHILLER



ALF FROST

COMMERCIAL REFRIGERATION



THERMOSTAT



BLOWER SYSTEM
COOLING FAN



CERTIFIED TO ISO 9001:2015
CERT. NO.: QMS 03504



AWARDED ASIA PACIFIC
TOP EXCELLENCE BRAND



DIGITAL CONTROLLER



BLOWER SYSTEM
AUTO DEFROST



SC-120



SC-250 / 350



SC-360B



SC-360W

MODEL	SC-120	SC-250	SC-350	SGR-360 B/W
DIMENSION (EXT.) MM	545 x 588 x 837	545 x 620 x 1727	600 x 655 x 1877	610 x 605 x 1975
CAPACITY (L)	120	250	350	360
SHELVING (PCS)	2	4	5	4
WEIGHT (KG) N/G	38.5 / 41.5	59 / 63.5	67.5 / 72.5	68 (N)
REFRIGERANT	R134a	R134a	R134a	R134a
TEMPERATURE (°C)	0 ~ 8	0 ~ 8	0 ~ 8	0 ~ 10
VOLTAGE/ FREQUENCY (V/Hz)	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
ENERGY CONSUMPTION (kW/ 24h)	0.9	2	2.2	6.8
WATTAGE (W)	160	240	250	285
AMPERE (A)	1.15	1.6	1.7	N/A
STANDARD FEATURES	- Air Cooler Blower System (Manual) - Hot Air Blowing Glass Door			2 Layers Hollow Glass (Outer Layer is Tempered) - British 3 Pin Plug

Please note that our technical features are subject to change without prior notice.



ALF FROST

COMMERCIAL REFRIGERATION

PREMIUM PRODUCT
100% GUARANTEE

C - Chiller | F - Freezer



CERTIFIED TO ISO 9001: 2015
CERT. NO. : QMS 03504



**CHAIN STORES
PREFERRED**



MODEL	HS-IDC (SILVER)	HS-IDF (SILVER)
DIMENSION (EXT.) MM	640 x805 x 2090	640 x805 x 2090
DIMENSION (INT.) MM	560 x 545 x 1460	560 x 545 x 1460
CAPACITY (L)	445	445
SHELVING (PCS)	5	5
WEIGHT (KG)	103	103
REFRIGERANT	R134a	R507a
TEMPERATURE (°C)	0 ~ 10	-10 ~ -20
VOLTAGE/ FREQUENCY (V/Hz)	220-240V/50Hz	220-240V/50Hz
ENERGY CONSUMPTION (kW/ 24h)	10	13
	Estimated Energy Cost (RM/ day) : 4.13	Estimated Energy Cost (RM/ day) : 5.37
PLUG POINT	13A	15A
STANDARD FEATURES	- Imported Tempered x2 Layer Glass Door - Auto Defrost - Digital Controller - Iron Clip 4 Wheels (2 Swivel, 2 Brake)	

Energy consumption was tested with frequently open and close door.

Please note that our technical features are subject to change without prior notice.

DISPLAY SERIES



Suitable for drinks, fruits, vegetables,
flowers and etc.

Economy

**** Only Chiller ****

One (1) Door
SC-120, SC-250, SC-350, SC-360

Two (2) Door
IMAX-CG-C12, IMAX-C12

Three (3) Door
IMAX-CG-C13, IMAX-C13

Standard

**** Only Chiller ****

Two (2) Door
IMAX-CI262 (White / Gold / Black)

Three (3) Door
IMAX-CI362 (White / Gold / Black)

Premium

One (1) Door
HS-1DC (Chiller), HS-1DF (Freezer)

Two (2) Door
HS-2DC (Chiller), HS-2DF (Freezer)

Three (3) Door
HS-3DC (Chiller), HS-3DF (Freezer)



Best Selling



Highly Recommended



Chain Stores Preferred



ALF FROST

COMMERCIAL REFRIGERATION

ECONOMY PRODUCT
GOOD VALUE TO BUY



CERTIFIED TO ISO 9001: 2015
CERT. NO. : QMS 03504



MODEL	IMAX-CG-C12	IMAX-CG-C13
DIMENSION (EXT.) MM	1219 x 737 x 1981	1803 x 737 x 1981
DIMENSION (INT.) MM	1130 x 572 x 1430	1702 x 572 x 1430
COOLING CAPACITY (L)	925	1395
SHELVING (PCS)	8	12
WEIGHT (KG)	135	187
REFRIGERANT	R134a	R134a
TEMPERATURE (°C)	0 ~ 10	0 ~ 10
VOLTAGE/ FREQUENCY (V/Hz)	220-240V/50Hz	220-240V/50Hz
ENERGY CONSUMPTION (kW/ 24h)	9	10
ESTIMATED ENERGY COST (RM/ day)	3.74	4.13
STANDARD FEATURES	• Vacuum Glass Door (Without Heater) • Auto Defrost • Digital Controller • Orange Signboard Sticker	

Energy consumption was tested with frequently open and close door.

Please note that our technical features are subject to change without prior notice.



ALF FROST

COMMERCIAL REFRIGERATION

ECONOMY PRODUCT
GOOD VALUE TO BUY



SIRIM
CERTIFIED TO ISO 9001:2015
CERT. NO.: QMS 03504



MODEL	IMAX-VP-C13	
DIMENSION (EXT.) MM	1803 x 737 x 1981	
DIMENSION (INT.) MM	1702 x 572 x 1430	
COOLING CAPACITY (L)	1395	
SHELVING (PCS)	12	
WEIGHT (KG)	178	
REFRIGERANT	R134a	
TEMPERATURE (°C)	0 ~ 10	
VOLTAGE/ FREQUENCY (V/Hz)	220-240V/50Hz	
ENERGY CONSUMPTION (kW/ 24h)	9	
ESTIMATED ENERGY COST (RM/ day)	3.17	
STANDARD FEATURES	• Vacuum Glass Door (Without Heater) • Piping System (Manual Defrost) • Blue Signboard Sticker	

Energy consumption was tested with frequently open and close door.

Please note that our technical features are subject to change without prior notice.



ALF FROST

COMMERCIAL REFRIGERATION

PREMIUM PRODUCT
100% GUARANTEE

C - Chiller | F - Freezer



2 Door

4
Wheels

4
Legs

3 Door

6
Wheels

6
Legs

MODEL	FG-DC-2DC KK BIG	FG-DC-3DC KK BIG	FG-DC-2DF KK BIG	FG-DC-3DF KK BIG
DIMENSION (EXT.) MM	1435 x 815 x 2413	2140 x 815 x 2413	1435 x 815 x 2413	2140 x 815 x 2413
DIMENSION (INT.) MM	1325 x 625 x 1880	2030 x 625 x 1880	1325 x 625 x 1880	2030 x 625 x 1880
CAPACITY (L)	1580	2400	1580	2400
SHELVING (PCS)	14	21	14	21
WEIGHT (KG)	220	300	240	350
REFRIGERANT	R134a	R134a	R507a	R507a
TEMPERATURE (°C)	0 ~ 10	0 ~ 10	-10 ~ -20	-10 ~ -20
VOLTAGE/ FREQUENCY (V/Hz)	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
PLUG	13A	13A	15A	15A
ENERGY CONSUMPTION (kW/ 24h)	18.7	25.4	35	57
STANDARD FEATURES	- Imported Tempered x2 Layer Glass Door - Auto Defrost - Digital Controller		- Imported Tempered x2 Layer Glass Door - Auto Defrost - Digital Controller	

Energy consumption was tested with frequently open and close door.

Please note that our technical features are subject to change without prior notice.



ALF FROST

COMMERCIAL REFRIGERATION



PREMIUM PRODUCT
100% GUARANTEE

C - Chiller | F - Freezer



4
Wheels



6
Wheels



MODEL	HS-2DC (G/S)	HS-3DC (G/S)	HS-2DF (G/S)	HS-3DF (G/S)
DIMENSION (EXT.) MM	1260 x 815 x 2090	1880 x 815 x 2090	1260 x 815 x 2090	1880 x 815 x 2090
DIMENSION (INT.) MM	1145 x 640 x 1243	1770 x 640 x 1243	1145 x 640 x 1243	1770 x 640 x 1243
CAPACITY (L)	1070	1665	1070	1665
SHELVING (PCS)	10	15	10	15
WEIGHT (KG)	165	225	175	260
REFRIGERANT	R134a	R134a	R507a	R507a
TEMPERATURE (°C)	0 ~ 10	0 ~ 10	-10 ~ -20	-10 ~ -20
VOLTAGE/ FREQUENCY (V/Hz)	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
ENERGY CONSUMPTION (kW/ 24h)	14	19	26	43
ESTIMATED ENERGY COST (RM/ day)	5.71	7.77	10.63	17.61
STANDARD FEATURES	Plug Point: 13A		Plug Point: 15A	
	- Imported Tempered x2 Layer Glass Door - Auto Defrost - Digital Controller		- Imported Tempered x2 Layer Glass Door - Auto Defrost - Digital Controller	

Energy consumption was tested with frequently open and close door.

Please note that our technical features are subject to change without prior notice.



ALF FROST

COMMERCIAL REFRIGERATION



CERTIFIED TO ISO 9001:2015
CERT. NO.: QMS 03504



AWARDED ASIA PACIFIC
TOP EXCELLENCE BRAND



OPEN CHILLER
HIF-FMGB 2.0



SGF-450

MODEL	HIF-FMGB 2.0	SGF-450 (Cooler Bing) **
DIMENSION (EXT.) MM	2100 x 1000 x 2100	650 x 810 x 2060
DIMENSION (INT.) MM	2000 x 900 x 2000	515 x 565 x 1220
CAPACITY (L)	1050	450
SHELVING (PCS)	8	4
WEIGHT (KG)	300	150
REFRIGERANT	R22	R404a
TEMPERATURE (°C)	2 ~ 8	7 ~ -13
VOLTAGE/ FREQUENCY (V/Hz)	220V/50Hz	220-240V/50Hz
ENERGY CONSUMPTION (kW/ 24h)	27	16.3
WATTAGE (W)	1960	750
STANDARD FEATURES	- Air Cooler Blower System (Auto Defrost) - Using Drain Pipe (Water Outlet)	- Beverage (-5.5 ~ -7 / -6.5) - Beer & Carbonated (-7 ~ -8.5) - Liquor (-11.5 ~ -12)

Please note that our technical features are subject to change without prior notice.



ALF FROST

COMMERCIAL REFRIGERATION



CERTIFIED TO ISO 9001: 2015
CERT. NO.: QMS 03504



MODEL	HL-ST-2DNCF	HL-ST-4DNCF	HL-ST-6DNCF
DIMENSION (EXT.) MM	587 x 700 x 1920	1180 x 700 x 1920	1773 x 700 x 1920
DIMENSION (INT.) MM	490 x 565 x 1280	1083 x 565 x 1230	1676 x 565 x 1280
CAPACITY (L)	380	900	1300
SHELVING (PCS)	3	6	9
WEIGHT (KG)	75	130	170
REFRIGERANT	R134a	R134a	R134a
TEMPERATURE (°C)	(C) 2 ~ 8 ; (F) -5 ~ -18	(C) 2 ~ 8 ; (F) -5 ~ -18	(C) 2 ~ 8 ; (F) -5 ~ -18
VOLTAGE/ FREQUENCY (V/Hz)	220V/50Hz	220V/50Hz	220V/50Hz
ENERGY CONSUMPTION (kW/ 24h)	3.5	5	8
WATTAGE (W)	220	400	430
STANDARD FEATURES	• Magnetic Glass Door (Up - Chiller) & Solid Door (Down - Freezer) • Piping System • Thermostat Controller • Swivel with Brake • British 3 Pin Plug		

Please note that our technical features are subject to change without prior notice.



ALF FROST

COMMERCIAL REFRIGERATION



2 IN 1 SYSTEM



HL-ST-2DUPC/F



HL-ST-4DUPC/F



HL-ST-UP6D4DC2DF
HL-ST-UP6D2DC4DF



EQY-4DUPRF

MODEL	HL-ST-2DUPC/F	HL-ST-4DUPC/F	HL-ST-UP6D4DC2DF/ 2DC4DF	EQY-4DUPRF
DIMENSION (EXT.) MM	587 x 700 x 1920	1180 x 700 x 1920	1773 x 700 x 1920	1200 x 745 x 1950
DIMENSION (INT.) MM	490 x 565 x 1230	1083 x 565 x 1230	1676 x 565 x 1280	1120 x 590 x 1410
CAPACITY (L)	380	900	1300	900
SHELVING (PCS)	3	6	9	6
WEIGHT (KG)	75	130	170	135
REFRIGERANT	R134a	(C) R134a (F)404a	(C) R134a (F)404a	R404a
TEMPERATURE (°C)	(C) 10 ~ -5 (F) -5 ~ -18	(C) 10 ~ -5 (F) -5 ~ -18	(C) 10 ~ -5 (F) -5 ~ -18	-17 ~ -22
VOLTAGE/ FREQUENCY (V/Hz)	220V/50Hz	220V/50Hz	220V/50Hz	220-240V/50Hz
ENERGY CONSUMPTION (kW/ 24h)	(C) 3.5 / (F) 4	(C) 4 / (F) 4.5	8.5 / 9.9	12.4
WATTAGE (W)	220	(C) 280 / (F) 480	390 / 920	1000
STANDARD FEATURES	• Magnetic Solid Door • Auto Defrost		• Digital Controller	Only Adjustable Leg is Available

Please note that our technical features are subject to change without prior notice.



ALF FROST

COMMERCIAL REFRIGERATION



EQY-1200CCM
EQY-1500CCM / CFM



EQY-1800CCM / CFM



EQ-2100CCM / CFM



CERTIFIED TO ISO 9001: 2015
CERT. NO. : QMS 03504



AWARDED ASIA PACIFIC
TOP EXCELLENCE BRAND

MODEL	EQY-1200CCM	EQY-1500CCM/ CFM	EQY-1800CCM/ CFM	EQ-2100CCM/ CFM
DIMENSION (EXT.) MM	1200 x 750 x 800	1500 x 750 x 800	1800 x 750 x 800	2100 x 750 x 850
CAPACITY (L)	290	400	510	610
SHELVING (PCS)	2	2	3	3
WEIGHT (KG)	83	89	96	102
REFRIGERANT	R134a	R134a	R134a	R134a
TEMPERATURE (°C)	(C) -2 ~ +8	(C) -2 ~ +8 (F) -12 ~ -22	(C) -2 ~ +8 (F) -12 ~ -22	(C) 0~ 5 (F) -18 ~ -21
VOLTAGE/ FREQUENCY (V/Hz)	220/50Hz	220/50Hz	220/50Hz	220/50Hz
ENERGY CONSUMPTION (kW/ 24h)	(C) 1.5	(C) 1.8 (F) 2.8	(C) 2 (F) 3.2	(C) 4.5
WATTAGE (W)	330	330 / 630	330 / 630	254
STANDARD FEATURES	For EQY Models: - Only Adjustable Leg is available. - Compressor at Left Side For All Models: - Magnetic Solid Door - Auto Defrost - Digital Controller - Stainless Steel 430			

Please note that our technical features are subject to change without prior notice.

CHEST / ISLAND FREEZER SERIES

Suitable for meats, drinks, sauce, vegetables and etc.



Chest Freezer

Solid Door

BD (W) 520, BD (W) 600, BD (W) 728,
BD (W) 227, BD (W) 327

Glass Door

HT-SC/SD(W)-256B, HT-SC/SD(W)-336B,
HT-SC/SD(W)-516B, SCSD-568S



Island Freezer

Glass Door

SD0.7A, SD0.8A



ALF FROST

COMMERCIAL REFRIGERATION



ALF FROST

COMMERCIAL REFRIGERATION



CERTIFIED TO ISO 9001:2015
CERT. NO. : QMS 03504



MODEL	BD (W) 728	
DIMENSION (EXT.) MM	1900 x 725 x 830	
CAPACITY (L)	691	
BASKET	1	
WEIGHT (KG) N/G	70 / 81	
REFRIGERANT	R290	
TEMPERATURE (°C)	-18 ~ -21	
VOLTAGE/ FREQUENCY (V/Hz)	220V/ 50Hz	
ENERGY CONSUMPTION (kW/ 24h)	3.6	
WATTAGE (W)	350	
AMPERE (A)	1.8	
STANDARD FEATURES	- Air Cooler Piping System - Manual Defrost - British 3 Pin Plug - Adjustable Thermostat - Lockable Door - Easy to Move with 6pcs of Wheels	

Please note that our technical features are subject to change without prior notice.



ALF FROST

COMMERCIAL REFRIGERATION



CERTIFIED TO ISO 9001:2015
CERT. NO. : QMS 03504



BD (W) 227



BD (W) 327

MODEL	BD (W) 227	BD (W) 327
DIMENSION (EXT.) MM	834 x 670 x 830	1104 x 670 x 830
CAPACITY (L)	227	327
BASKET	1	1
WEIGHT (KG) N/G	33.4 / 36.4	39.5 / 43.1
REFRIGERANT	R600a	R600a
TEMPERATURE (°C)	-18 ~ -21	-18 ~ -21
VOLTAGE/ FREQUENCY (V/Hz)	240V/ 50Hz	240V/ 50Hz
ENERGY CONSUMPTION (kW/ 24h)	1.45	1.58
WATTAGE (W)	120	130
AMPERE (A)	1	1.1
STANDARD FEATURES	- Air Cooler Piping System (Manual) - British 3 Pin Plug - Lockable Solid Door - Thermostat Controller - Adjustable Thermostat	

Please note that our technical features are subject to change without prior notice.



ALF FROST

COMMERCIAL REFRIGERATION



MODEL	BD (W) 520	BD (W) 600
DIMENSION (EXT.) MM	1600 x 760 x 830	1800 x 760 x 830
CAPACITY (L)	520	600
BASKET	1	1
WEIGHT (KG) N/G	58.5 / 63.4	62 / 67.3
REFRIGERANT	R134a	R134a
TEMPERATURE (°C)	-18 ~ -21	-18 ~ -21
VOLTAGE/ FREQUENCY (V/Hz)	220-240V/ 50/60Hz	220-240V/ 50/60Hz
ENERGY CONSUMPTION (kW/ 24h)	2.19	2.69
WATTAGE (W)	245	260
AMPERE (A)	2.0	2.1
STANDARD FEATURES	- Air Cooler Piping System (Manual) - British 3 Pin Plug - Adjustable Thermostat - Lockable Door - LED Light (No On/Off Switch)	

Please note that our technical features are subject to change without prior notice.



ALF FROST

COMMERCIAL REFRIGERATION



HT-SC/SD(W)-256B



HT-SC/SD(W)-336B
HT-SC/SD(W)-516B



SCSD-568S



CERTIFIED TO ISO 9001:2015
CERT. NO.: QMS 03504



ACCREDITED CERTIFICATION BODY



AWARDED ASIA PACIFIC
TOP EXCELLENCE BRAND

MODEL	HT-SC/SD(W)-256B	HT-SC/SD(W)-336B	HT-SC/SD(W)-516B	SCSD-568S
DIMENSION (EXT.) MM	834 x 653 x 900	1034 x 653 x 900	1634 x 653 x 900	1860 x 670 x 805
CAPACITY (L)	256	336	516	691
BASKET	1	1	4	7
WEIGHT (KG) N/G	40.6 / 45.6	45 / 51	60.8 / 68.4	70 / 81
REFRIGERANT	R290	R290	R290	R290
TEMPERATURE (°C)	-18 ~ -21	-18 ~ -21	-18 ~ -21	-18 ~ -21
VOLTAGE/ FREQUENCY (V/Hz)	240V/50Hz	240V/50Hz	240V/50Hz	220V/50Hz
ENERGY CONSUMPTION (kW/ 24h)	1.8	2.6	3.2	5.4
WATTAGE (W)	200	220	280	450
AMPERE (A)	1.5	1.7	2.5	2.5
STANDARD FEATURES	- Air Cooler Piping System (Manual) - British 3 Pin Plug - Adjustable Thermostat			- Lockable Glass Door - LED Light (No On/Off Switch) - Excluding LED Light

Please note that our technical features are subject to change without prior notice.



ALF FROST

COMMERCIAL REFRIGERATION



MODEL	SD0.7A (Auto Defrost)	SD0.8A (Auto Defrost)	SD0.8M (Manual Defrost)
DIMENSION (EXT.) MM	1860 x 880 x 860	2100 x 880 x 860	2100 x 830 x 860
DIMENSION (INT.) MM	1715 x 720 x 750	1950 x 720 x 750	1950 x 680 x 805
CAPACITY (L)	800	950	760
BASKET	6pcs (770 x 265 x 205)mm	6pcs (770 x 305 x 205)mm	7
WEIGHT (KG)	128	138	128
REFRIGERANT	R290a	R290a	R290a
TEMPERATURE (°C)	-18 ~ -22	-18 ~ -22	-18 ~ -22
VOLTAGE/ FREQUENCY (V/Hz)	220V/50Hz	220V/50Hz	220-240V/50Hz
ENERGY CONSUMPTION (kW/ 24h)	7.4	7.8	6.8
WATTAGE (W)	550	750	550
AMPERE (A)	4.2	4.8	3.2
STANDARD FEATURES	- Adjustable Thermostat - British 3 Pin Plug - LED Light (On/Off Switch) - Grey Color only (Europe Compressor)		

Please note that our technical features are subject to change without prior notice.




ALF FROST

COMMERCIAL REFRIGERATION



CERTIFIED TO ISO 9001:2015
CERT. NO.: QMS 03504

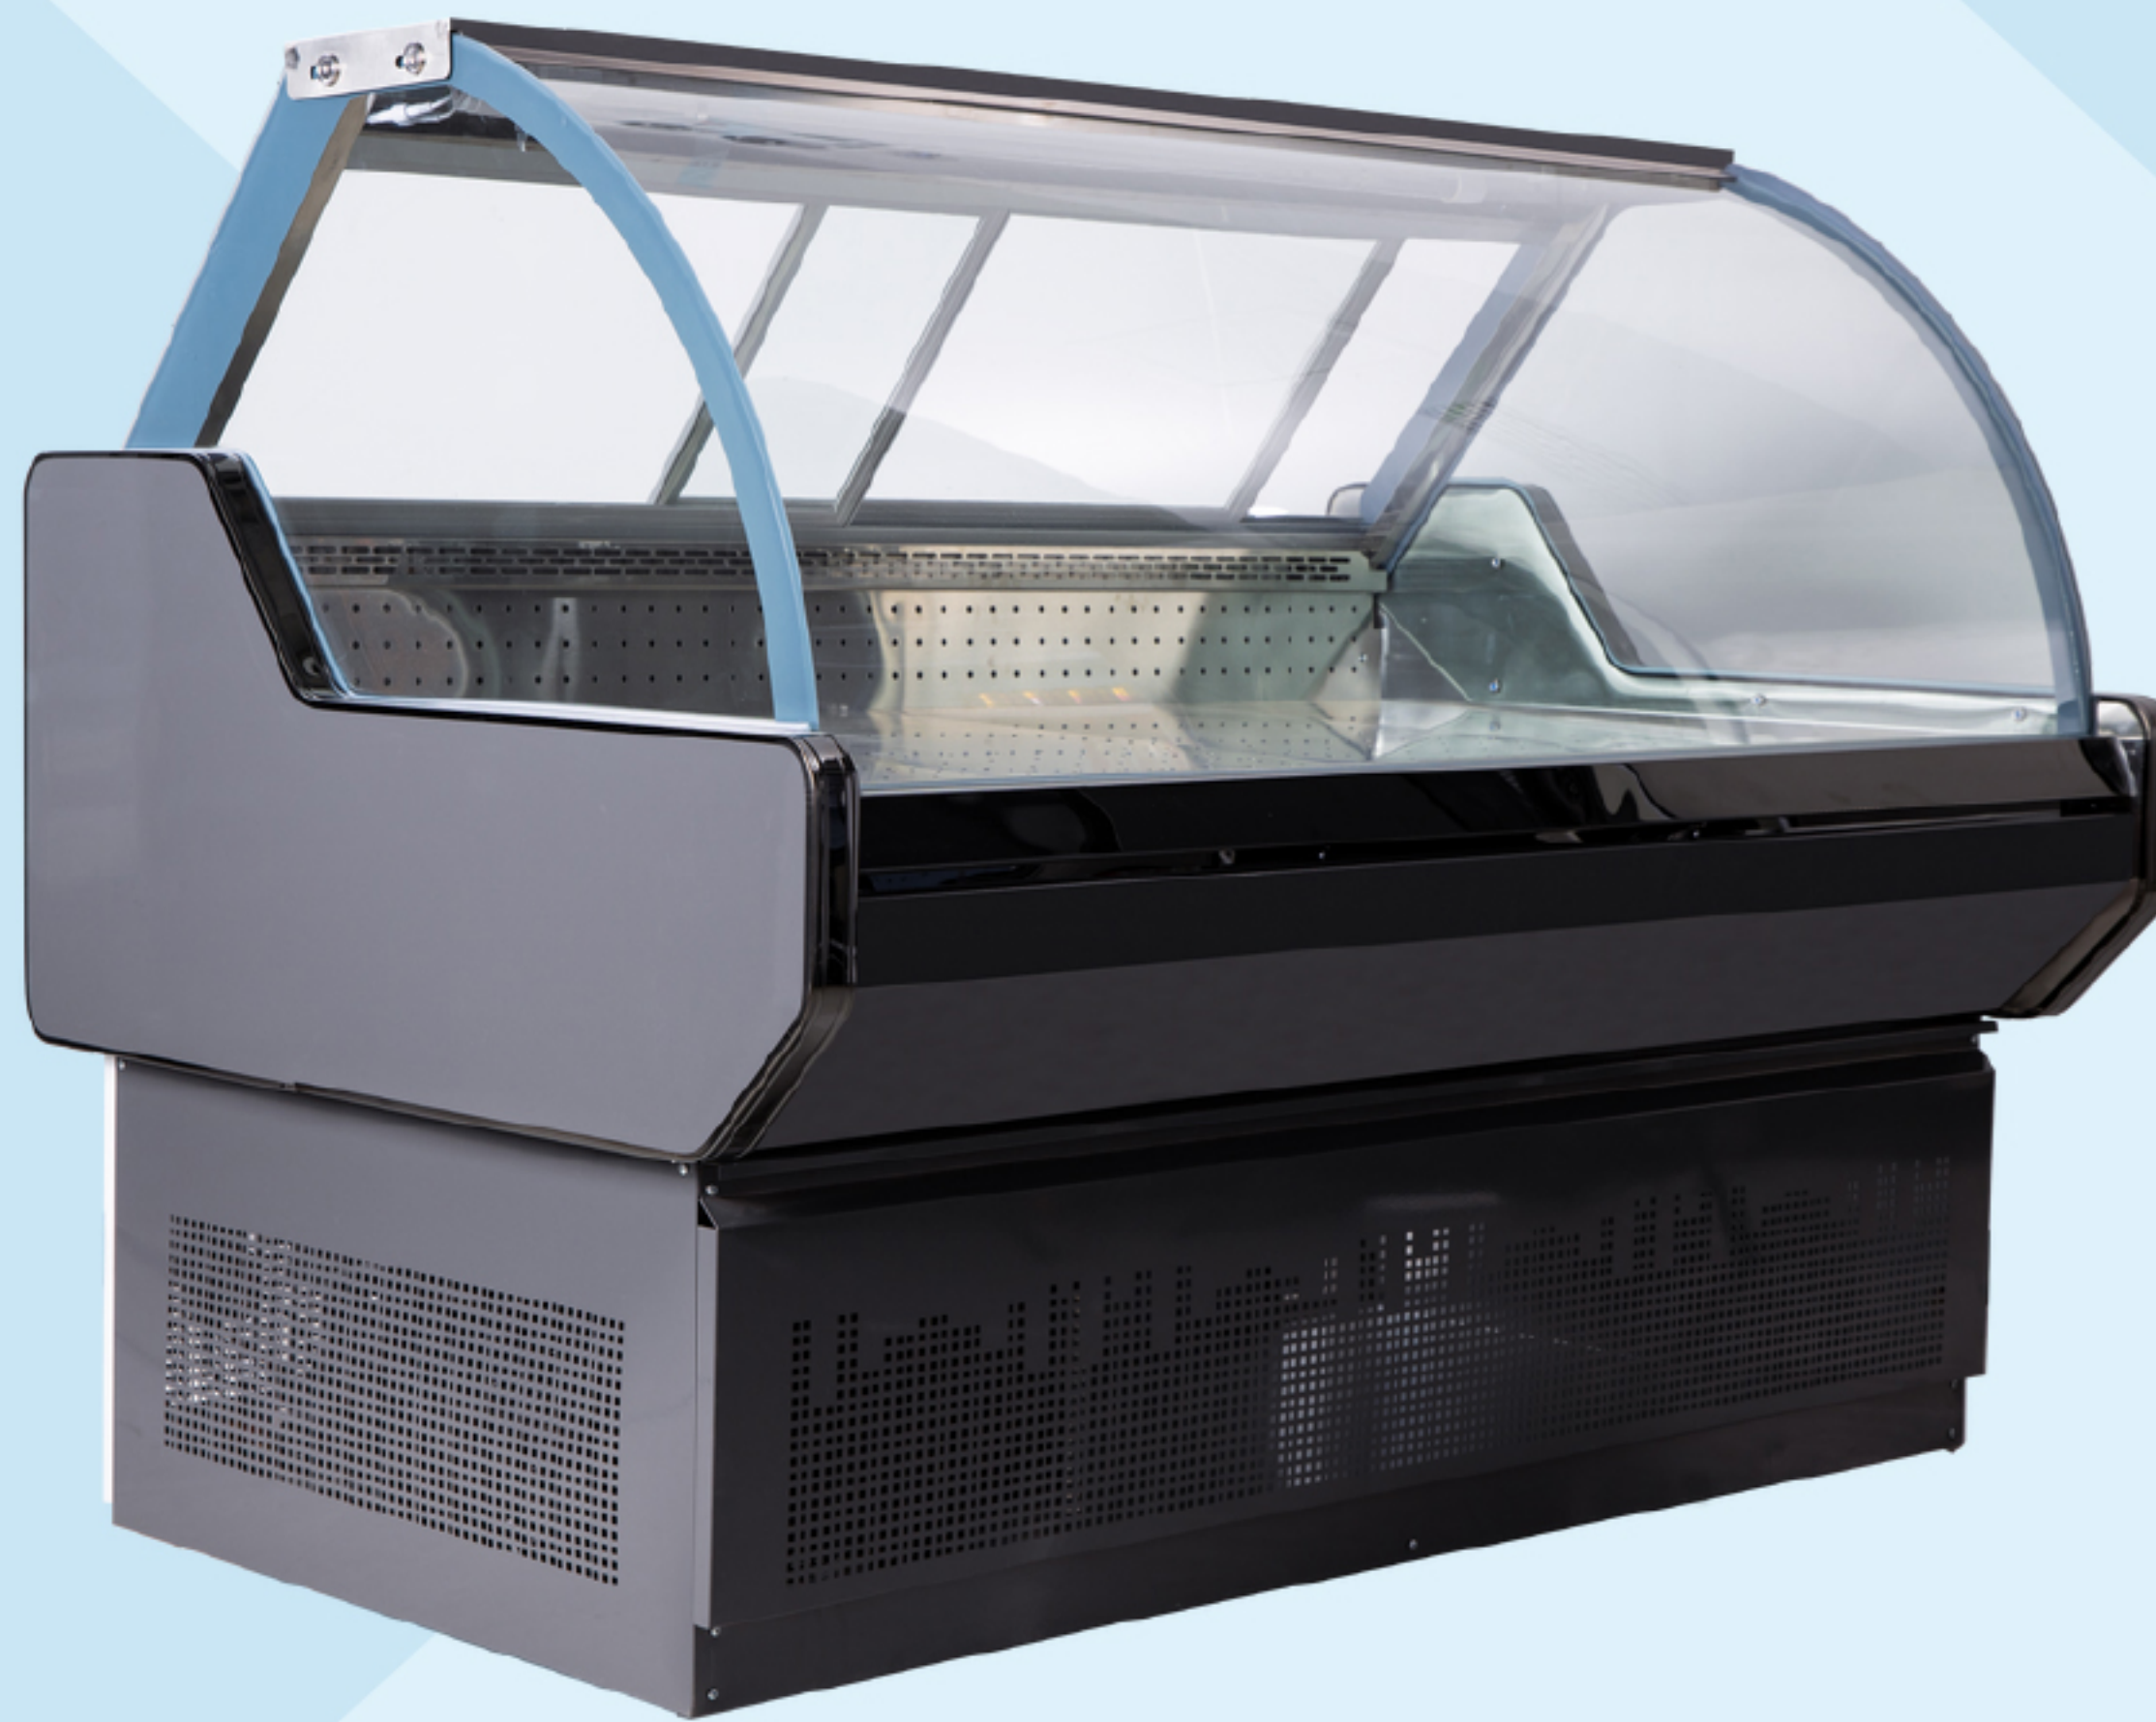

ARC MEAT CHILLER FREEZER
IF-VBXCf-2.0



FLAT MEAT CHILLER
IF-VBXBI-2.0

MODEL	IF-VBXCf-2.0	IF-VBXBI-2.0
DIMENSION (EXT.) MM	2100 x 1150 x 1380	2100 x 1150 x 950
DIMENSION (INT.) MM	2000 x 1050 x 1280	2000 x 1050 x 850
CAPACITY (L)	845	370
CASTOR (PCS)	4	4
WEIGHT (KG)	200	95.5
REFRIGERANT	R404	R134a
TEMPERATURE (°C)	Upper (C) 1 ~ 6 ; Lower (F) -17	2 ~ 8
VOLTAGE/ FREQUENCY (V/Hz)	220V/50Hz	220V/50Hz
ENERGY CONSUMPTION (kW/ 24h)	20	3.4
WATTAGE (W)	1200	355
AMPERE (A)	-	2.4
STANDARD FEATURES	• Chiller (C) - Blower System (Glass Door) • Freezer (F) - Piping System (Solid Door)	• Piping System Manual Defrost

Please note that our technical features are subject to change without prior notice.